



ISOblow SMART PLUS

Is a very compact, light and ergonomically friendly blowing machine. It is used mainly in refurbishment for the insulation of pitched roofs, for loose blowing and for core insulation. 2 hard-wearing shredder shafts ensure the insulation material is well loosened and a powerful blower provides the necessary air output. A 5-chamber airlock is relatively large in proportion to the size of the machine. The airlock size and the 3" outlet guarantee high performance. Standard operation of the ISOblow SMART PLUS is by radio remote controls with a cord. As an option the machine can also be operated by a 4-channel radio remote control. The air volume is regulated from the switch box. Material flow is controlled by an airlock slide-gate. Filling is supported by a practical shelf. On special request an optional inlet can be supplied for free-flowing insulation.

ISOCELL RADIO REMOTE CONTROL:

Radio remote control cord 4-channel radio control

The advantages are obvious

large hopper with two shredder shafts

extension is removable

6-chamber air-lock with seals of Abrasion-resistant rubber. No

pressure loss - Minimum wear

backflow flaps protect the blower from blockage

flow adjustable via slider

lighting current is sufficient.





extraction only conditionally possible (a special air intake cover with a 3"

hose connection is required)

easy to transport due to large pneumatic wheels



ISOblow SMART PLUS

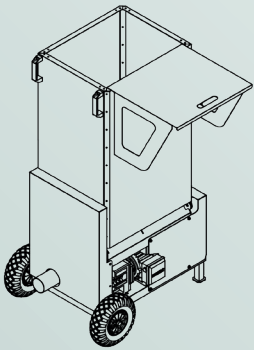

	850 x 650 x 1420 mm (AxBxC)
	105 kg
	225 l

	0,75 kW

	2 x 1,4 kW
	~ 3,55 kW
	350 mbar
	360 m³/h
	230 V / 50 Hz, 16 A
	3" (76 mm)
	Radio remote control cord 4-channel radio control

